



Specifications

SMART Board® 6075 interactive flat panel with iQ

Model SPNL-6275

Overview

The SMART Board® 6075 interactive flat panel with iQ is the hub of your classroom. iQ technology connects devices, lesson content and pedagogically relevant software to create a cohesive educational experience. PC-free embedded computing provides one-touch access to a diverse suite of SMART applications—Notebook lessons, amp workspaces, lab gamification activities and whiteboard—and collaborative tools, such as wireless screen sharing and a web browser. There's no need for wires, cables or manual software and firmware updates.




The 75" 4K ultra-high-definition LED display provides optimal image clarity and wide viewing angles. With the Pen ID™ feature, you can assign different appearances to the two pens and write or draw over any application in digital ink.

Object awareness™ allows you to perform mouse functions with your finger, write in digital ink with the pen, and erase with your palm or eraser—all without switching tools or modes. You can use a variety of gestures in applications, and two users can write or draw at the same time.

See education.smarttech.com for more information about this product.

Dimensions and weights¹

Dimensions

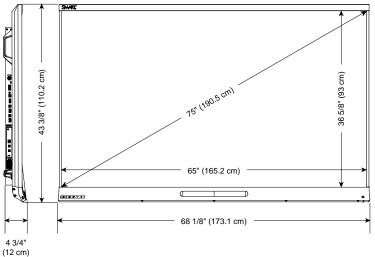

Weight

185 lb. (84 kg)

Shipping dimensions (including pallet)

75 3/8" × 54 3/8" × 14" (191.6 cm × 138 cm × 35.5 cm)

Shipping weight

238 lb. (108 kg)



As an ENERGY STAR® certified signage display, the SMART Board 6075 interactive flat panel with iQ meets strict energy efficiency guidelines set by the U.S. Environmental Protection Agency and Department of Energy.

 1 All dimensions \pm 1/8" (0.3 cm). All weights \pm 2 lb. (0.9 kg).

Hardware

Interaction

Touch technology DViT® (Digital Vision Touch) technology

Multitouch capabilities 8 touches²

Object awareness Behavior adjusts automatically to the tool or object you're using, whether it's a pen, finger,

eraser or palm.

Pen ID Two people can write independently and simultaneously, using different colored ink.

Display

Type LED

Aspect ratio 16:9

Optimal resolution 3840 × 2160 at 30 Hz (HDMI®) or 60 Hz (DisplayPort)

Horizontal frequency

(typical)

135 kHz

Vertical frequency

(typical)

60 Hz

Contrast ratio (typical) 5000:1

Brightness (maximum) 360 cd/m²

Pixel dimensions 0.429 mm × 0.429 mm

Gamut 72% of NTSC

Viewing angle 178°

Response time (typical) 8 ms

Presence detection Presence detection sensor on the bottom frame

Audio 10 W integrated speakers (×2)

Noise level <35 dBA

Included cables and

accessories

iQ appliance

8' (2.4 m) country-specific power cable

16' 5" (5 m) USB cable

Pen (×2)

iQ appliance

Wireless technology Bluetooth® 4.0 dual mode (backwards compatible with Bluetooth 2.1 + EDR)

Capture options Establish a Bluetooth wireless connection with a supported mobile device (see below) by

scanning the interactive display's unique QR code

²Requires SMART Product Drivers to be installed. Some applications might not support 8 touches.

HDCP encrypted HDMI out

RJ45

Supported languages French

> German Italian Japanese Korean Norwegian

Simplified Chinese

Spanish Swedish

Traditional Chinese

For a standard VESA® 600 mm × 400 mm mounting plate Mounting holes

Lower mounting holes 13 3/4" (35 cm) from the bottom of the interactive flat panel

Mounting bracket depth Minimum depth of 15/8" (4.2 cm) for all components on the back of the interactive display to

clear the wall

Connectors

Side Connector panel iQ appliance USB 3.0 Type-A (×2)

OPS slot (for the iQ appliance) HDMI1 input connectors

HDMI in USB Type-B

HDMI2 input connectors

HDMI in USB Type-B

DisplayPort input connectors

DisplayPort in USB-Type-B Stereo 3.5 mm out

RS-232 in

Bottom USB 2.0 Type-A

Back AC power inlet

Installation requirements

Interactive flat panel See the SMART Board 6000 and 6000 Pro series interactive displays installation and

maintenance guide (smarttech.com/kb/171167)

mobile app

SMART Notebook Player iOS 10 or later operating system software

SMART BOARD 6075 INTERACTIVE FLAT PANEL WITH IQ - MODEL SPNL-6275

SMART kapp® app

Apple devices iOS 9 or later operating system software

50 MB of storage iPhone 4S or later

Third-generation iPad or later First-generation iPad mini or later Fifth-generation iPod touch or later

Android[™] devices Android 4.4.4 (KitKat) or later operating system

50 MB of storage (internal or SD card)

1024 MB of RAM

720p or better screen resolution

Bluetooth 2.1 + EDR

3 megapixel or better rear-facing camera (recommended)

SMART kapp viewer

Mobile Safari for iOS 9 or later operating system software

Chrome[™] for Android 39.0.2171.93 or later

Desktop Internet Explorer® 10 or later

Chrome 39.0.2171.95 or later Firefox® 34.0.5 or later Safari 8.0 or later

Room computers and guest laptops

General requirements See the SMART Notebook software release notes

4K UHD Graphics card that can support 3840 × 2160 resolution at 30 Hz and that has 1 GB DDR 5 memory

See Minimum requirements for Ultra High Definition or 4K on your interactive flat panel

Mini-computers

General requirements See the SMART Notebook software release notes

Dimensions Smaller than 10" \times 10" \times 2" (25.4 cm \times 25.4 cm \times 5.1 cm)

Weight Less than 10 lb. (4.5 kg)

Mounting VESA 75 mm \times 75 mm or 100 mm \times 100 mm mounting pattern

Cable requirements

HDMI Maximum length: 23' (7 m)

NOTES

- Use only certified HDMI cables that have been tested to support the performance standard you require.
- The performance of cables longer than 23' (7 m) is highly dependent on the cable's quality.

DisplayPort DisplayPort 1.2 compliant or better

Maximum length: 23' (7 m)

USB Maximum length: 16' (5 m)

Important Using cables that exceed these maximum lengths can produce unexpected results, such as

degraded picture quality or USB connectivity. Refer to *SMART installation standards* (smarttech.com/kb/171035) for comprehensive information about cables and extensions for

SMART hardware products.

Storage and operating requirements

Power requirements 100V to 240V AC, 50 Hz to 60 Hz

Interactive flat panel and iQ appliance power consumption at 77°F (25°C)

Standby mode 19 W

Normal operating 190 W

Maximum operating 315 W

Standalone interactive flat panel power consumption at 77°F (25°C)

Standby mode <2 W

Normal operating

(out-of-box)

<131 W

Operating temperature 41–95°F (5–35°C)

Storage temperature -4-140°F (-20-60°C)

Humidity 5–80% relative humidity, non-condensing

Certification and compliance

Regulatory certification UL (U.S./Canada), FCC, IC, EMC, LV, VCCI, PSE

Environmental compliance

European Union REACH, RoHS, WEEE and Packaging

U.S. Packaging and Conflict Minerals

Purchasing information

Order number

SPNL-6275 SMART Board 6075 interactive flat panel with iQ and SMART Learning Suite

Optional accessories

WM-SBID-501 Fixed wall mount for SMART Board interactive displays

Other See smarttech.com/accessories

Warranty Three-year limited equipment warranty

SPECIFICATIONS

SMART BOARD 6075 INTERACTIVE FLAT PANEL WITH IQ - MODEL SPNL-6275

Extended warranty

EWY1-SPNL-6275 One-year warranty extension

EWY2-SPNL-6275 Two-year warranty extension

smarttech.com/support smarttech.com/contactsupport

© 2017–2018 SMART Technologies ULC. All rights reserved. SMART Board, SMART kapp, DViT, Pen ID, Object Awareness, smarttech, the SMART logo and all SMART taglines are trademarks or registered trademarks of SMART Technologies ULC in the U.S. and/or other countries. IPhone, iPad, iPod touch and Safari are trademarks of Apple Inc., registered in the U.S. and other countries. Google Play, Android and Chrome are trademarks of Google Inc. The Bluetooth word mark is owned by the Bluetooth SIG, Inc. and any use of such marks by SMART Technologies ULC is under license. All other third-party product and company names may be trademarks of their respective owners. This product and/or use thereof is covered by one or more of the following U.S. patents: www.smarttech.com/patents. Contents are subject to change without notice. 04/2018.