


NEC V302W

Order Code: 60003895

NEC Value Projector

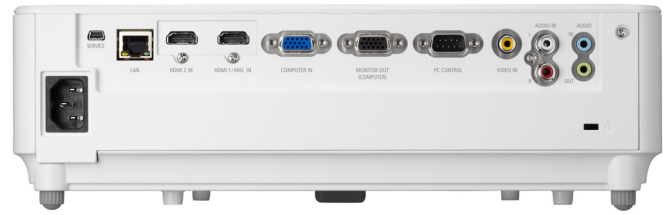

The compact size in combination with light weight makes the V Series easy to place it wherever you need it. With 3000 ANSI lumens brightness and 10000:1 contrast, this compact projector is recommended for screen sizes of up to 115" diagonal in typical office environments.

The excellent price performance ratio makes this projector especially suitable for classrooms and mid-sized meeting rooms.

BENEFITS

Excellent price performance ratio - due to a rich feature set.

Full media playback capabilities - with 8W speaker and 3D support.

Future-proof connectivity - incl. HDMI and network support.

3D ready - future-proof DLP®-Link™ technology with 144 Hz and Top/Bottom, 60 Hz.



NaViSet
Administrator 2

IMAGE	Projection Technology	1-chip DLP™ Technology
	Native Resolution	1280 x 800 (WXGA)
	Aspect Ratio	16:10
	Contrast Ratio ¹	10000:1
	Brightness ¹	3000 ANSI Lumen
	Lamp	195 W AC
	Lamp Life [hrs]	6000 Eco (4500 High Bright Mode)
	Lens Offset [%]	62.7
	Projection Factor	1.55 – 1.7 : 1
	Projection Distance [m]	1 – 11
	Screen Size (diagonal) [cm] / [inch]	Maximum: 762 / 300"; Minimum: 76.2 / 30"
	Zoom	Manual
	Focus Adjustment	Manual
	Supported Resolutions	Up to 1920x1080
	Frequency	Horizontal: 15–100 kHz (RGB: 24 kHz– 100 kHz); Vertical: 50 – 120 Hz
CONNECTIVITY	RGB (analog)	Input: 1 x Mini D-sub 15-pin, compatible to component (YPbPr) Output: 1 x Mini D-sub 15 pin
	HDMI™	Input: 2 x HDMI™ (Deep Color, Lip sync)
	Video	Input: 1 x RCA
	Audio	Input: 1 x RCA Stereo for Video and S-Video; 2 x 3.5 mm Stereo Mini Jack Output: 1 x 3.5 mm Stereo Mini Jack
	Control	Input: 1 x D-Sub 9 pin (RS-232) (male)
	LAN	1 x RJ45
	USB	1 x Mini USB
	Video Signals	NTSC; NTSC 4.43; PAL; PAL-M; PAL-N; PAL60; SECAM
REMOTE CONTROL	Remote Control	Aspect Ratio; Audio Control; Auto Adjust; Automatic Picture Adjustment; Freeze-function; Help-function; ID set; Keystone Correction; Lamp Mode Control; Magnify-function; Picture Adjust; Picture Mode; Picture Mute; Source Select
ELECTRICAL	Power Supply	100-240 V AC; 50 - 60 Hz
	Power Consumption [W]	237 (High Bright) / 194 (Eco) / 3 (Network Stand-by) / 0.5 (Stand-by)
MECHANICAL	Dimensions (W x H x D) [mm]	324 x 88 x 250 (without lens and feet)
	Weight [kg]	2.7
	Fan Noise [dB (A)]	30 / 34 (Eco / Normal)
ERGONOMICS	Safety and Ergonomics	CE; ErP; RoHS; TÜV GS
	Speakers [W]	1 x 8 (mono)
ADDITIONAL FEATURES	Special Characteristics	3D ready DLP®-Link™, 144 Hz and Top/Bottom, 60 Hz; 6-segment Colour Wheel; Auto Power Start; BrilliantColor™ and VIDi technology; Carbon Savings Meter; Crestron RoomView; Long Life Lamp; Manual vertical Keystone Correction (V= ±40°); NaViSet Administrator 2; Off-Timer; Plug & Play; Quick-Start-/Direct-Power-Off Function; Virtual Remote for direct PC control
GREEN FEATURES	Energy Efficiency	Intelligent Power Management
	Ecological Materials	100% recyclable packaging; Downloadable manuals
	Ecological Standards	ErP compliant; RoHS compliant; WEEE
WARRANTY	Projectors	3 years pan-European service
	Light Source	6 months, max. 1000 hrs
SHIPPING CONTENT	Shipping Contents	IR Remote Control (RD-469E); Lens Cap; Mini D-SUB Signal Cable (1.8 m); Power Cord; Projector; Quick Setup Guide; Users Manual
OPTIONAL ACCESSORIES	Optional Accessories	3D Starter Kit (NP01SK3D); DLP-Link 3D Glasses (NP02GL/VolfoniFit); Lamp (NP36LP); Universal Ceiling Mounts (PJ01UCM)

¹ Compliance with ISO21118-2005